

K 7777 B

Built-in refrigerator

FlexiLight 2.0, PerfectFresh Active – active humidification for best freshness.



- Fresh 5x longer with active humidification – PerfectFresh Active
- Individually adjustable glass shelf lighting with FlexiLight 2.0
- Uniform temperature distribution inside the appliance – DynaCool
- Door shelf heights can be adjusted individually
- No visible condensation thanks to dry CleanSteel back wall

EAN: 4002516895336 / Material number: 12819500 /
Old Material Number: 36777702EU1

Appliance category	
Refrigerator	•
Construction type	
Built-in appliance	•
Integrated appliance	•
Door hinge	right
Convertible door hinging	•
Design	
Refrigeration section lighting	FlexiLight 2,0
Fan lighting	•
Freshness system lighting	•
User convenience	
Networking with Miele@home	•
Freshness system	PerfectFresh Active
Active humidification in top drawer	•
Fine adjustment inner door	•
ComfortClean	•
DynaCool	•
ComfortSize	•
SoftClose	•
SelfClose	•
Control system	
Operating concept	FreshTouch
Fridge compartment can be switched off	Yes
Independent temperature regulation of fridge and freezer zones	No
SuperCool	•
No. of temperature zones	2
Sabbath mode	•
Party mode	•
Holiday mode	•
Fridge/Fridge section	
No. of shelves	7
including number of split shelves (FlexiBoard)	1
of which illuminated	4
Chrome-plated metal bottle rack	•
No. of crisper drawers	3
Dry back wall	CleanSteel
Number of inner door racks for tinned food	3
Door rack for bottles	2
Door shelves	5
Efficiency and sustainability	
Energy efficiency class (A–G)	B
Annual energy consumption in kWh	79,57
Energy consumption in 24 h in kWh	0,21
Safety	
Lock function	•
Acoustic door alarm	•

K 7777 B

Built-in refrigerator

FlexiLight 2.0, PerfectFresh Active – active humidification for best freshness.



EAN: 4002516895336 / Material number: 12819500 /

Old Material Number: 36777702EU1

Optical door alarm

•

Technical data

Niche width in mm min.	560
Niche width in mm max.	570
Niche height in mm min.	1772
Niche height in mm max.	1788
Niche depth in mm	550
Appliance width in mm	559
Appliance height in mm	1770
Appliance depth in mm	546
Weight in kg	72,7
Door hinge technology	Fixed door
Max. door front weight – refrigerator, in kg	26
Climate class	SN-T
Refrigerator compartment in l	296
including PerfectFresh zone in l	98
Pantry compartment in l	296
Total usable capacity in l	296
Acoustic airborne noise emission class (A–D)	A
Sound emissions in dB(A) re 1 pW	29
Current consumption (mA)	1200
Voltage in V	220-240
Fuse rating in A	10
Number of phases	1
Frequency in Hz	50-60
Length of supply lead in m	2,2
Replacing lamps	Service

Accessories included

Egg tray

•


PerfectFresh organisation box

•

K 7777 B

Built-in refrigerator

FlexiLight 2.0, PerfectFresh Active – active humidification for best freshness.

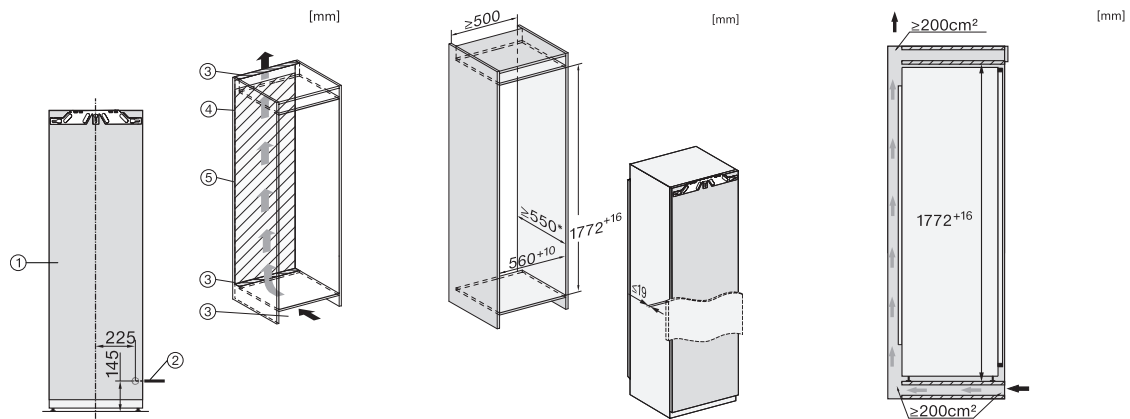

K7733E, K7763E, K7732E, K7734F, K7764E, K7743E, K7744E, K7773D, K7774D (footnote*) (installation drawings)

*1. View from the front, 2. Mains connection cable, L = 2200 mm, 3. Ventilation cut-out min. 200 cm², 4. Ventilation, 5. No connections permitted in this area

K7733E, K7763E, K7732D, K7732E, K7734F, K7764E, K7743E, K7744E, K7773D, K7774D, built-in (footnote*) (drawings)

*The declared energy consumption was calculated in a 560 mm deep niche. The appliance is fully functional in a 550 mm niche but the energy consumption will be slightly higher.

K7733E, K7763E, K7732E, K7734F, K7764E, K7743E, K7744E, K7773D, K7774D, side view (installation drawings)